

## REMOVING - REFITTING : FRONT MUD FLAPS

### 1. Recommended tools

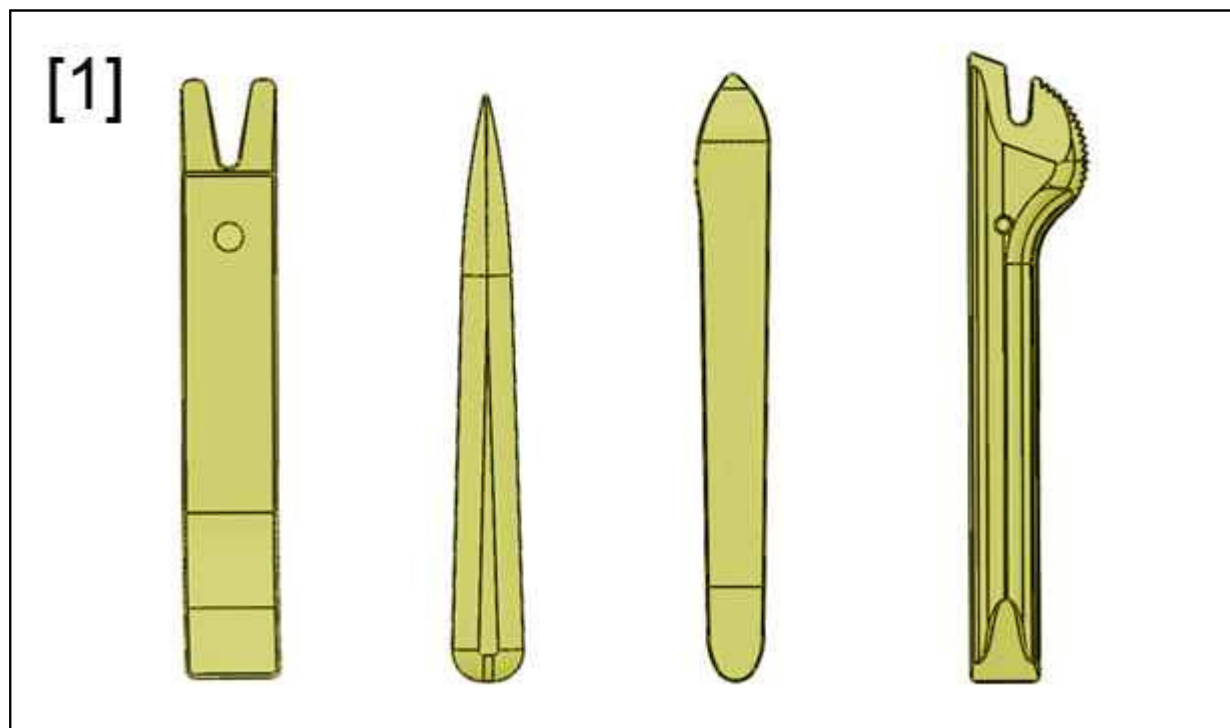


Figure : E5AP30WD

[1] Stripping tool (-).1350-ZZ.

### 2. Removing

#### 2.1. On the driver's side

Place the vehicle on a 2 -post lift.  
Remove the front wheels.

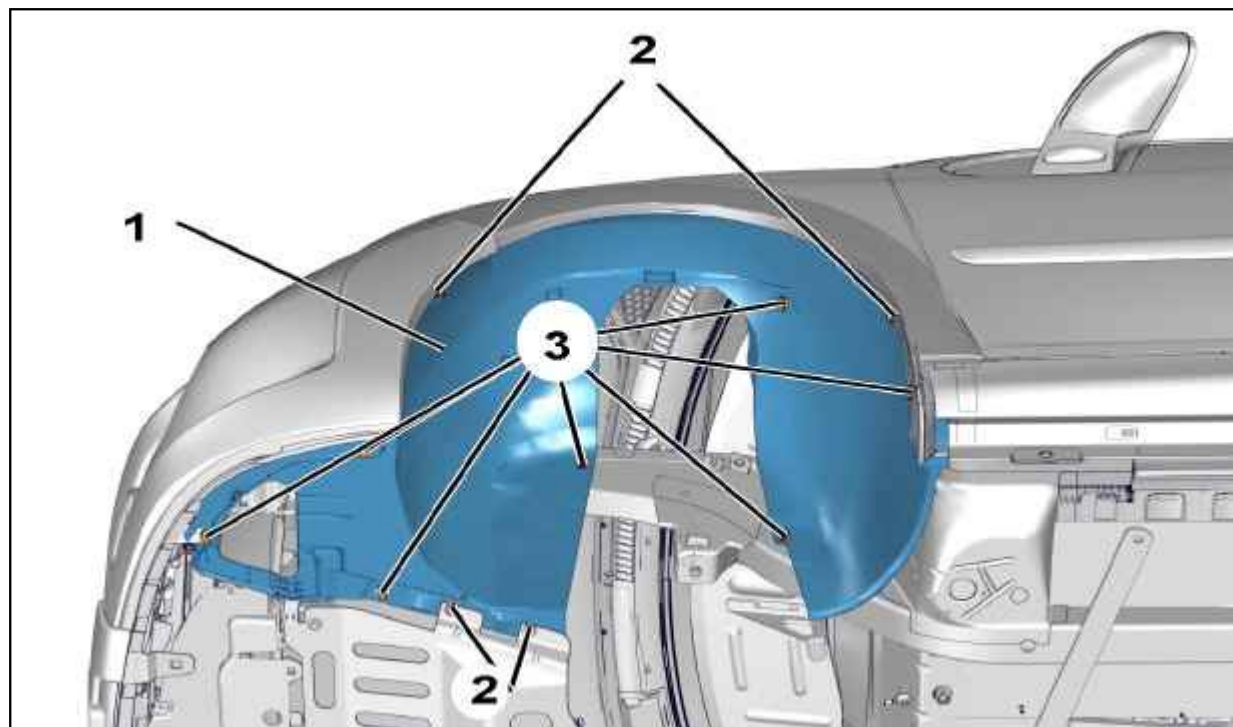


Figure : C5JM00WD

Unclip the clips (3) ; Using tool [1].

Remove :

- The bolts (2)
- The splash shield (1)

## 2.2. Passenger 's side

Proceed in the same way to remove the splash shield on the passenger's side.

## 3. Refitting

Proceed in the reverse order to removal.

Fit the wheels ; Tightening to  $10 \pm 1$  daN.m.

**N.B. :** Check the condition of the securing clips ; Replace if necessary.