

REMOVING - REFITTING : REAR MUD GUARD

1. Removing

Place the vehicle on a two-post ramp.
Remove the rear wheels.

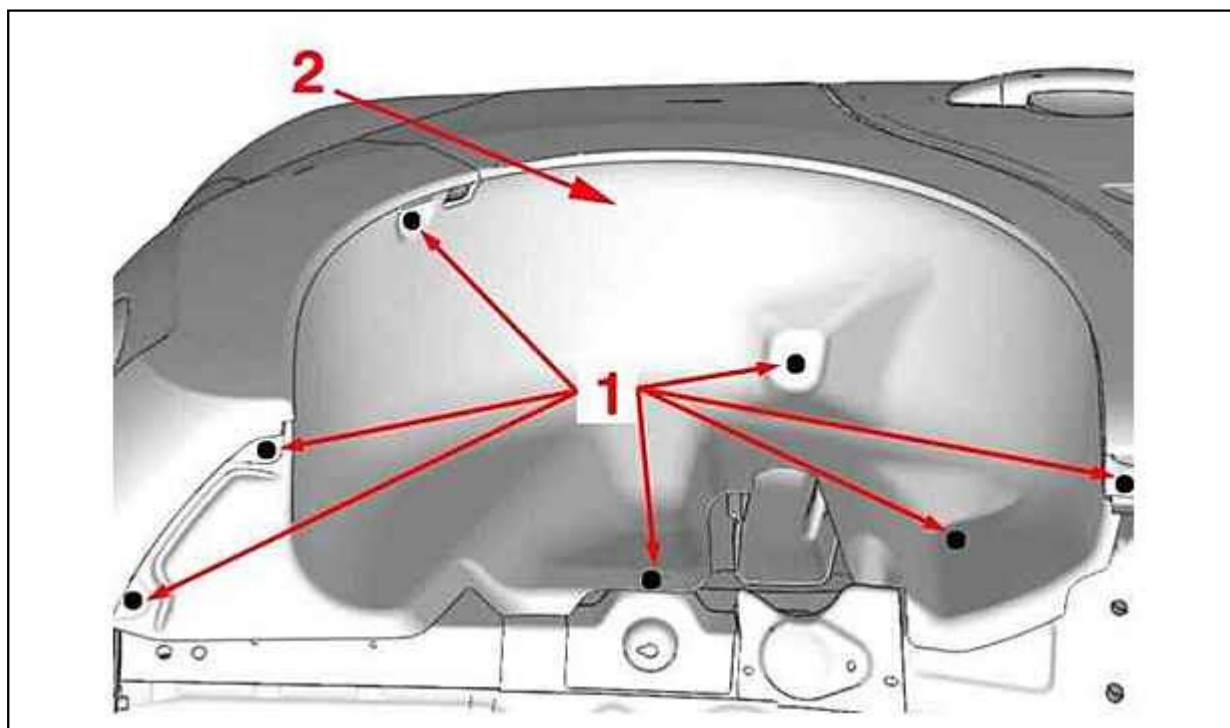


Figure : C5JK0QRD

Remove the clips (1) (each side) .
Remove the splash shield (2) (each side) .

2. Refitting

Proceed in the reverse order to removal.