

SECTION 11

EXHAUST SYSTEM

GENERAL DESCRIPTION	11 — 144
INSPECTION	11 — 145
ON- CAR SERVICE	11 — 145

GENERAL DESCRIPTION

The exhaust system consists of an exhaust manifold, an exhaust center pipe, a muffler, a tail pipe and a seal gasket, etc.

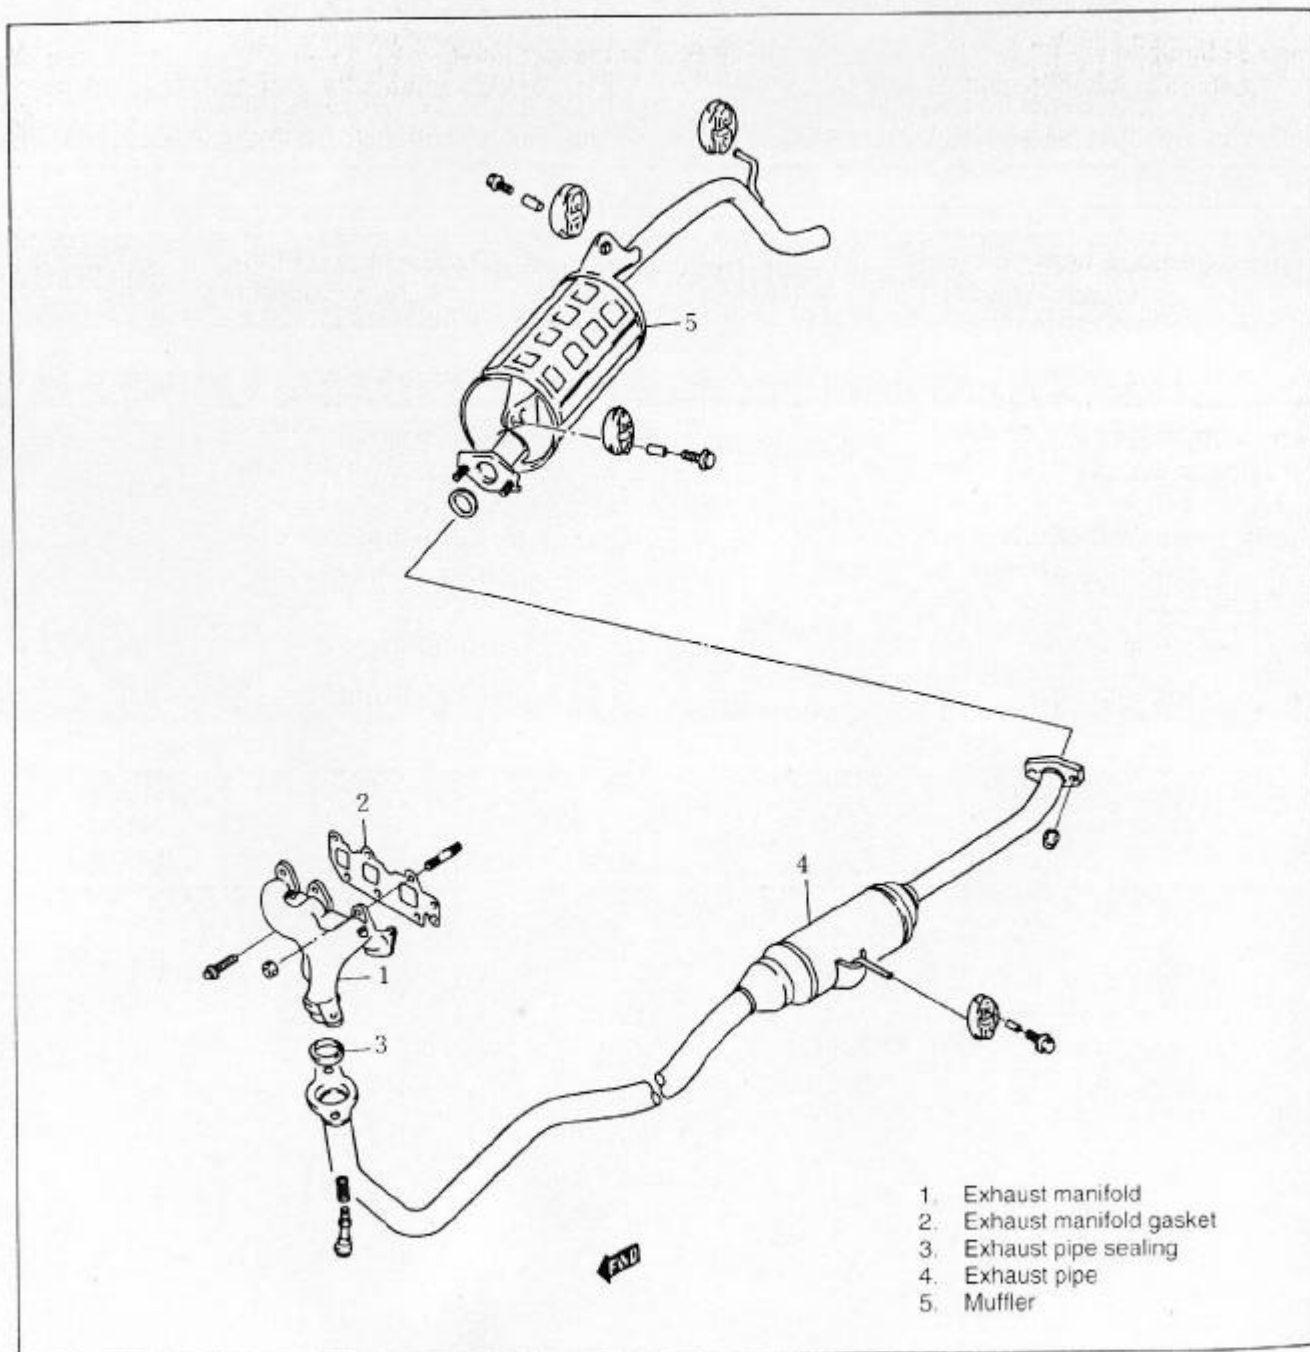


FIG. 11 — 1 EXHAUST SYSTEM

INSPECTION

CAUTION

To avoid the danger of being burned, do not touch the exhaust system during hot. Any service on the exhaust system should be performed after being cooled.

In case of periodic or other maintenance service, check as follows.

- Check rubber mounting for damage, deterioration and out of position.
- Check exhaust system for leakage, loose connection and damage.
- Check the damage on body area, mispositioned part, crack on connection, hole and loose connection which cause leakage of exhaust gas into car.
- Make sure that the clearance between exhaust system and underbody is enough to prevent the damage of carpet from overheating.

ON-CAR SERVICE

- Refer to Fig. 1A-20 for removal and installation procedures of exhaust manifold.
- Check gasket and seal for deterioration and damage when removing exhaust manifold. If necessary, replace them.
- Tighten bolts and nuts to specified torque when reassembling.

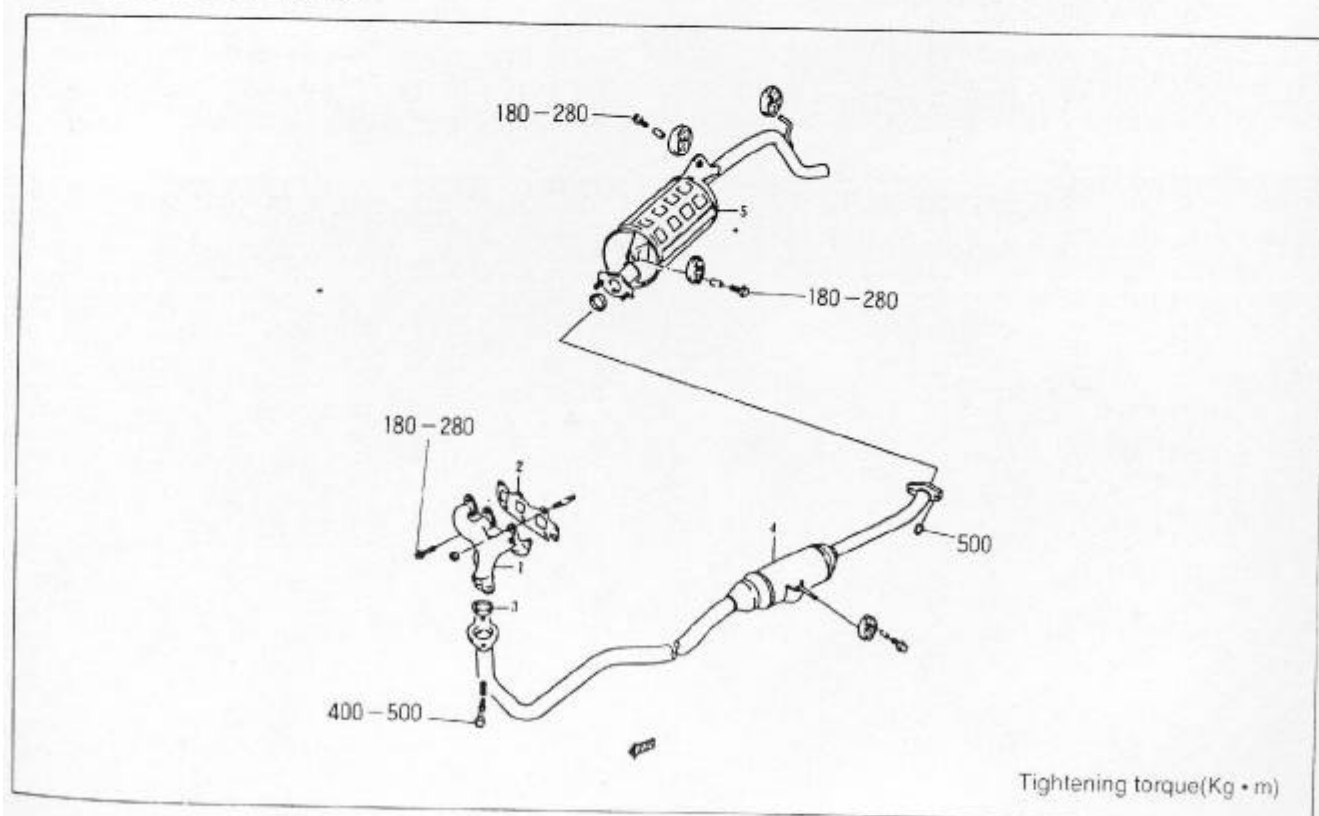


FIG. 11 — 2 VIEW OF TIGHTENING TORQUE