

ANTENNA CORD SUB-ASSY REPLACEMENT

670KE-01

HINT:

COMPONENTS: See page 67-2


1. REMOVE INSTRUMENT PANEL SAFETY PAD SUB-ASSY(See page 71-12)

HINT:

Refer to the instructions for removal of the instrument panel sub-assy.

2. REMOVE ANTENNA CORD SUB-ASSY

- (a) Remove the 4 clamps and antenna cord sub-assy.

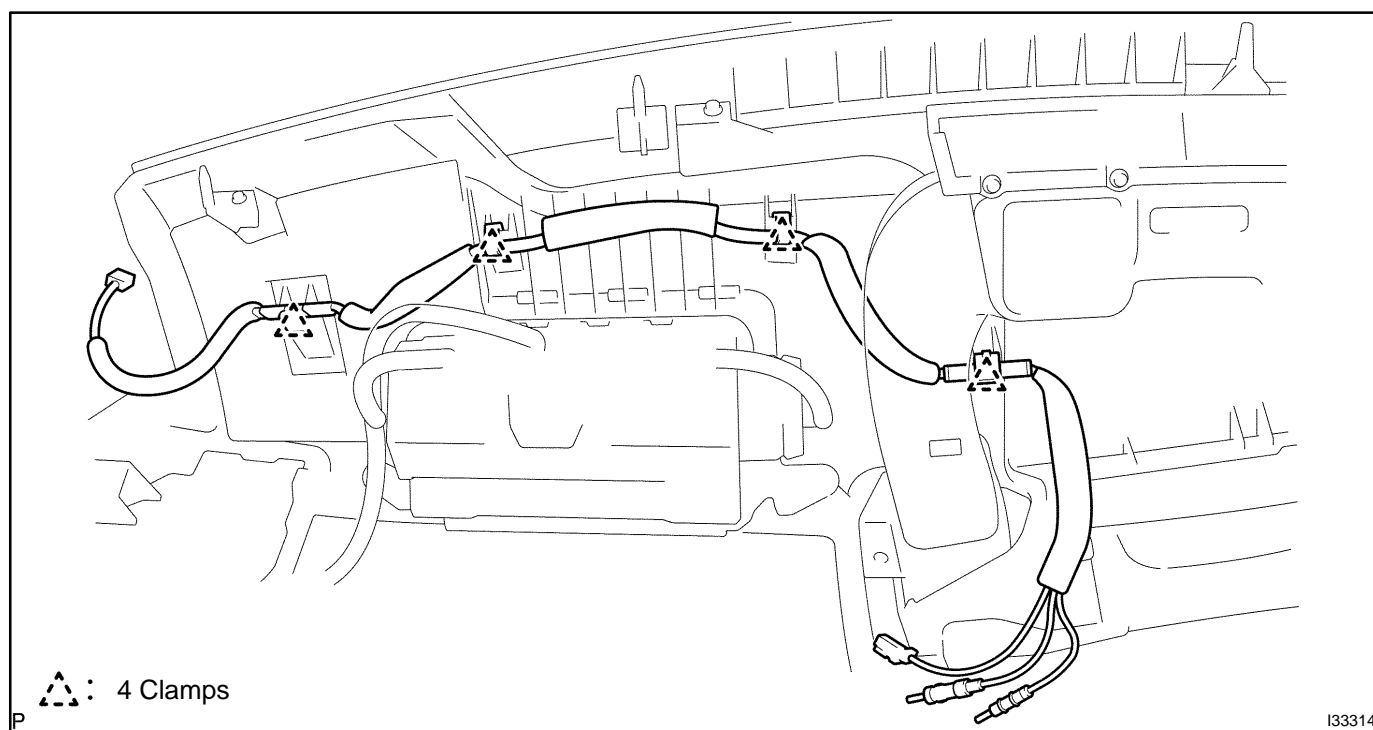

3. INSTALL INSTRUMENT PANEL SAFETY PAD SUB-ASSY(See page 71-12)