

STEREO COMPONENT SPEAKER ASSY FRONT

REPLACEMENT

670KB-01


HINT:

COMPONENTS: See page [67-2](#)

1. REMOVE INSTRUMENT PANEL SAFETY PAD SUB-ASSY(See page [71-12](#))

HINT:

Refer to the instructions for removal of the instrument panel sub-assy.

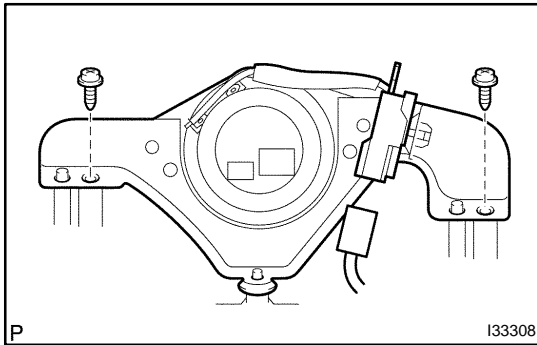

2. REMOVE STEREO COMPONENT SPEAKER ASSY FRONT

- (a) Disconnect the connector.
- (b) Remove the 2 screws and stereo component speaker assy front.

3. INSTALL INSTRUMENT PANEL SAFETY PAD SUB-ASSY(See page [71-12](#))