


1503

INSPECTION PROCEDURE

1 INSPECT DLC3(TC TERMINAL VOLTAGE)

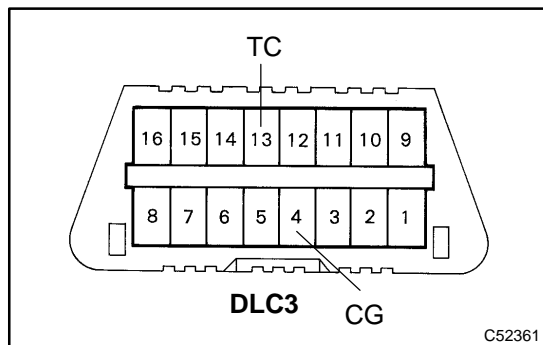

- (a) Turn the ignition switch to ON.
- (b) Measure voltage between terminals TC and CG of DLC3.

Standard:

10 - 14 V

OK

Go to step 3

NG

2 CHECK HARNESS AND CONNECTOR(DLC3 - BODY GROUND)

- (a) Check for open and short circuit in harness and connector between terminal CG of DLC3 and body ground (See page 01-35).

NG

REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

3 CHECK HARNESS AND CONNECTOR(DLC3 - ECM)

- (a) Check for open and short circuit in harness and connector between terminal TC of DLC3 and ECM (See page 01-35).

NG

REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

CHECK AND REPLACE ECM (See page 01-35)